



# Element Grow Light

## FIXTURE APPEARANCE

HOUSING	LENS
<ul style="list-style-type: none"> <li>Industrial Strength Machine Formed Aluminum</li> </ul>	<ul style="list-style-type: none"> <li>Polycarbonate</li> </ul>

## ELECTRICAL CHARACTERISTICS

- Standard AC input: 120-277 VAC
- Available AC input: Up to 480 VAC
- EMI filter: 47CFR, part 2, part 15
- Power factor: >.9
- Total harmonic distortion: <20%
- Surge protection: IEC/EN 61000-4-5 EMC test standard
- High Voltage

## LED LIGHT ENGINE

- L70 Rated life of 100,000+ hours
- Luminaire Efficacy(lm/W): 140.00
- Luminaire Efficacy(PPF/W): 1.76-2.3
- Operating temp: -30° C to +60° C
- No toxic chemicals/ROHS compliant
- ETL certified, meets UL and CSA standards
- 50-90% energy savings
- Manufactured in the USA

## AVAILABLE LIGHT ENGINES

SPECTRUM	WATTAGE	DELIVERED PPF
Full Spectrum	208 W	366 PPF
Full Spectrum + Red	208 W	378 PPF
Blue + Red	208 W	478 PPF

## Grow Characteristics

- Modular grow light
- ¼ of XL Warehouse Grow Light
- Perfect for growing over large areas
- Designed for 400-600W HPS or MH Replacement
- Uses Less than half the energy of HPS or MH
- Plug provided for easy installation
- Super efficient 1.76-2.3 PPF/W **TESTED**
- More grow for less!

## MOUNTING

- Hook

## WARRANTY

- 5-year manufacturer's warranty
- U.S manufacturing and quality control

## INSTALLATION


- Contact Noribachi for additional information

## CERTIFICATIONS




## FIXTURE DIMENSIONS


- Length: 18"
- Width: 18"
- Height: 3.5"

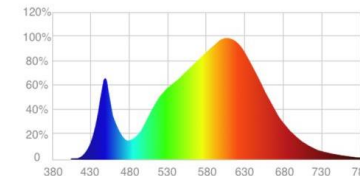

Full Spectrum

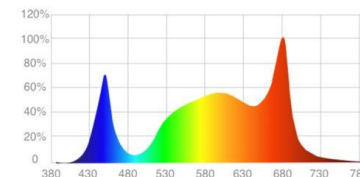

Full Spectrum + Red

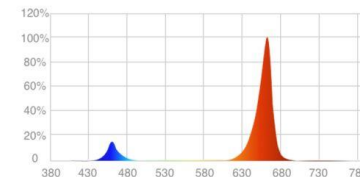

Blue + Red